

➔ 6S Beauty System



Laser Aesthetics
South Africa

Applications

- Skin rejuvenation
- Wrinkle removal
- Skin tightening
- Face shaping, body contouring
- Fat reduction, cellulite reduction
- Fatigue relieving, vacuum massage
- Metabolism improvement and acceleration


Features

- Unique advantages:
 - a. 6 different systems: Monopolar RF+Bipolar RF+Tripolar RF+Ultrasonic cavitation+Cavitation&RF+Vacuum&tripolar RF
 - b. 6 handpieces
 - c. Japan imported vacuum pump, ensure efficient and safe treatment in clinic
 - d. USA and France imported "plug and play" handpiece connectors, translate into reliable energy and long using life
- Efficiency: 40.5KHz ultrasonic cavitation technology is best for fat reduction--safe and efficient, integrating with other systems and our referenced clinic studies; excellent treatment result can be expected at the first treatment, better result to the super fat men specially
- Convenience:
 - a. Internal superior modular design, easy installation and maintenance
 - b. User friendly software means that operator error is drastically reduced
 - c. Strong package: Aluminum alloy case
- Effective inbuilt cooling system maintains the epidermis at comfortable levels
- Professional OEM/ODM services
- Suitable for the performance of Skin Care Center, Spa, Medical Spa, Clinic, Hospital

About Handpiece



Before and After Treatment

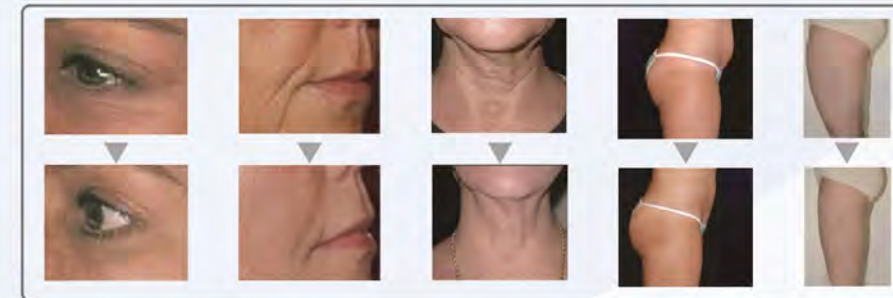

Specifications

Controller	8.4" color touch LCD display
Output power	1000W
Cavitation frequency	40.5KHz
Ultrasonic power	1-50W/cm ²
RF frequency	6MHz
RF energy	1-50J
Vacuum pressure	0 ~ -0.1Mpa
Handpiece number	6 S1 monopolar RF handpiece(cooling): with 2 probes, spot size: 16/32mm S2 bipolar RF handpiece(cooling): with 2 probes, spot size: 16/32mm S3 tripolar RF handpiece S4 cavitation handpiece S5 cavitation + monopolar RF handpiece S6 vacuum absorption + tripolar RF handpiece
Cooling system	semiconductor+ air + water + cooling gel
Skin cooling	≤0-10°C
Program language	English
Working time	continuously / time setting
Dimension of machine	45*50*122cm
Dimension of package	47*61*134cm
N.W.	34kg
G.W.	52.5kg
Packing	Aluminum alloy case
Voltage	220V / 110V